


Advanced Model Checking
 Winter term 2010-11

– Series 10 –

Hand in on January 26'th before the exercise class.

Exercise 1

(4 = 3 + 1 points)

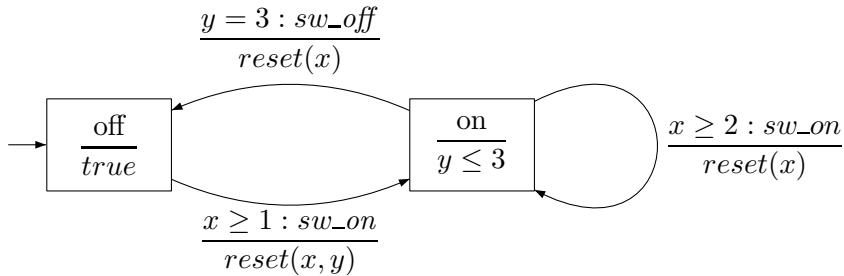
 For the timed automaton *LightSwitch* for the light switch illustrated below,


- (a) Determine the region transition system $RTS(LightSwitch, true)$.
- (b) Check whether *LightSwitch* is timelock-free and non-zeno.

Exercise 2

(2 = 1 + 1 points)

Consider the following two timed automata:

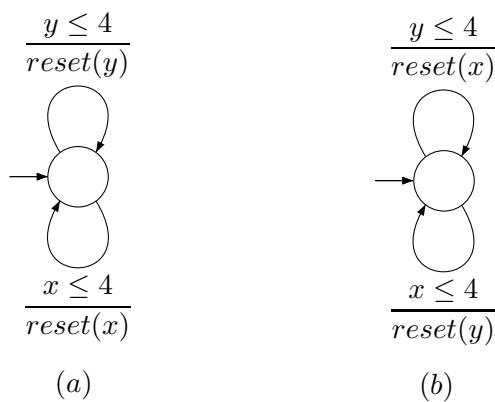


As these timed automata have a single location only, the *state* of these timed automata can be considered as just a point in the real plane. A point (d, e) (with $d, e \geq 0$) thus represents that clock x has value d and clock y has value e . Determine the reachable state space of each of these timed automata. Justify your answers.

Exercise 3

(4 = 1 + 3 points)

 Given the following timed automata *TA*:

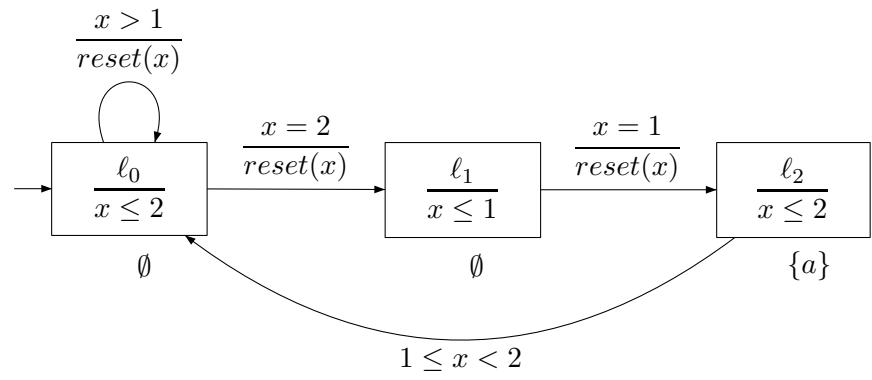

Questions:

- (a) Determine the set of states $Sat(\exists \diamondsuit^{\leq 4} a)$.
- (b) Determine the region transition system $RTS(TA, \text{true})$.